

Product Data Sheet

Knauf AQUAPANEL® Joint Filler & Skim Coating – White



AQUAPANEL® Joint Filler & Skim Coating – white is a cement-bound filling material for full-surface skim coating on AQUAPANEL® Cement Boards or as a joint filler between AQUAPANEL® Cement Board Indoor panels.

Areas of Application

Joint Filler or Skim Coating for AQUAPANEL® Boards. When used as a joint filler, AQUAPANEL® Tape (10 cm) must be embedded.

Key Benefits

- Option to use the product as a joint filler or skim coating
- Can be applied by hand or machine

Compliance Standards

EN 998-1:2016

Performance Data

Reaction to Fire (R2F)	Thermal Conductivity (W/mK)	Dangerous Substances	Adhesion (N/mm ² , FP: B)	Water Absorption	Water Vapour diffusion (μ) (Dry/Wet) (EN1745)	Durability	Impact Resistance	Airborne Sound Insulation
A1	≤ 0.45 for P = 50%* ≤ 0.49 for P = 90%*	NPD	≥ 0.08	Wc2	Dry = 0 Wet = 5	NPD	NPD	NPD

*(Table value EN 1745, dry density ≤1400kg/m³)

Technical Information

Dimensions and Weights			
Colour	Bag Size (kg)	Coverage (kg/m ²)	Material Number
White	20	4.2 (for full-surface skim coat)	131095

Sustainability

Substances of very high Concern (SVHC)

At the time of publication, under REACH UK and REACH EU regulations this product contains no SVHC. For more information please consult the Safety Data Sheet.

Volatile Organic Compound Content (VOC)

8x10⁹ g/L

For more information please consult the Safety Data Sheet.

Storage and Handling

Filler should only be applied to AQUAPANEL® Cement Board once the board has adapted to the ambient climatic conditions. The material, ambient and base temperature must not fall below +5 °C.

Store bags in a dry place. Pour the contents of damaged bags into a container and use first.

Packaging

Recyclable paper bags.

Shelf Life/Service Life

12 Months.

Disposal

Mix remaining dry material with water and put with the domestic waste. Do not empty the remaining dry material into a surface water drain or WC.

Health & Safety

Please refer to our Safety Data Sheet for guidance on Personal Protection Equipment required for the handling and installation of this product.

Application / Installation

AQUAPANEL® Cement Boards must be dry, clean and dust-free & fixed firmly to a structurally supporting framework. The surface must be primed with AQUAPANEL® Board Primer.

Stir 20kg AQUAPANEL® Joint Filler & Skim Coating into approx. 6.8l of cold, clean water (0.34l water/kg AQUAPANEL® Joint Filler & Skim Coating). We recommend the use of a 600 rpm stirring machine. Use a clean mixing container and mixing tool.

Joint treatment:

Tools: Float/smoothing trowel

Fill joints, place AQUAPANEL® Tape (10cm) and press in with a trowel. Apply a thin layer to cover the tape.

Skim Coating:

Tools: Float/ trowel/ joint knife.

Optional tools: notched trowel with 8/8mm teeth.

Apply AQUAPANEL® Joint Filler & Skim Coating to a thickness of ≥ 4mm and spread evenly. If necessary, comb through with an 8/8mm notched trowel. Press AQUAPANEL® Reinforcing Mesh over the whole area with approx. 10cm joint overlaps and then skim over thinly.

To achieve a felted surface suitable for wallpapering or painting, skim over the first coat after hardening with a further 2 – 3mm thick coat of AQUAPANEL® Joint Filler & Skim Coating. After stiffening has begun, felt the surface with a felt or sponge disc and, if necessary, with a smoothing float or trowel. Immediately after use, clean tools and equipment using clean water.

The material begins to stiffen approx. 45 minutes after stirring. Dirty mixing containers and tools, as well as high temperatures or wind can shorten the working time. Do not use the material once it has begun to stiffen.

Working time for hand application: approx. 16-20 minute/m² (incl. embedding AQUAPANEL® Reinforcing Mesh).

Working time for machine application: approx. 11-12 minutes/m² (without AQUAPANEL® Reinforcing Mesh).

Additional Documentation


[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

[Safety Data Sheet](#)

Certification

[Environmental Product Declaration](#)

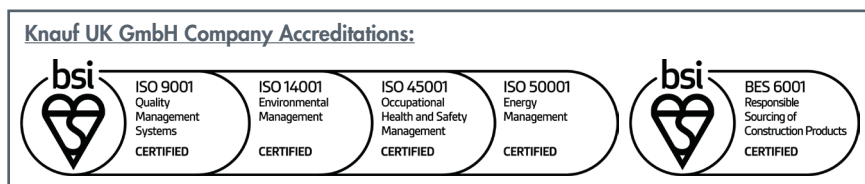

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

0800 521050 (option 2)
Live Webchat 09:00 -17:00
technical-uk@knauf.com

Website

www.knauf.co.uk
www.knauf.ie

Address

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

KML100474

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.

© Copyright Knauf 2023

Creation Date: 15/08/2023

Revision Reference: 001

Revision Date: 15/08/2023

Build for the world we live in