



KNAUF

CONTUR

DEMOUNTABLE ACOUSTIC CEILING

- ✓ Uniform, demountable surface
- ✓ Space-saving installation
- ✓ Ideal for renovation projects and open spaces

FEATURES

- T-grid ceiling
- Edge D design
- Concealed grid
- Installation from below the T-grid
- Installation depth down to 63mm

SUSTAINABLE PRODUCT:

- Made from gypsum
- Recyclable
- Improved indoor climate
- Repaintable without loss of acoustics








Build for the world we live in

CONTUR


DEMOUNTABLE ACOUSTIC CEILING



PRODUCT VARIANTS

EDGE DESIGN	 <p>EDGE D Concealed grid. Non-perforated border around the edge of the tile</p>			
PERFORATION DESIGN Also available without perforations (plain)				
PERFORATION MEASURES	MICRO Square 3x3 mm c/c 8.33 mm	GLOBE Circles Ø 6 mm c/c 15 mm	QUADRIL Square 12x12 mm c/c 30 mm	TANGENT Obround 4x14 mm c/c 10/20 mm
PERFORATION %	10.2%	10.2%	13%	21.3%
NRC @200mm No mineral wool	0.60	0.65	0.65	0.75
ALPHA-W @200mm No mineral wool	0.65 (Class C)	0.60 (Class C)	0.60 (Class C)	0.80 (Class B)
LIGHT REFLECTION	72.1%	72.8%	75.1%	70.9%
SIZES mm	600x600x12.5			
TILE WEIGHT kg/m²	9.45 - 10.20			
SURFACE TREATMENT	Front: White acrylic paint, RAL 9003, gloss 5. Back: Acoustic felt backing. Galvanised metal clips. Available in other colours on request.			
SYSTEM COMPONENTS	1) Gypsum ceiling tile 2) T24/38 main runner 3) Spacer bar 4) Hanger			
CERTIFICATES	1) Environmental product declaration 2) Danish Indoor Climate Labelling 3) ISO 16000-9 Emission of VOCs 4) UL-listed in accordance to R26164			

PRODUCT PERFORMANCE

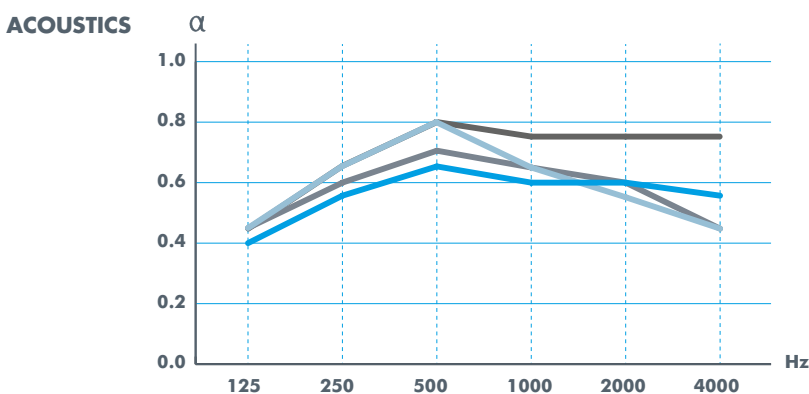

FIRE CLASSIFICATION

A2-s1, d0

AIR QUALITY

Indoor value: 10 days
Particle emission: LOW
Active air purification with Cleaneo technology

AMBIENT CONDITIONS

Can withstand:
- Constant RH 70% and 25°C
- Ambient temperatures of up to 50°C.

LOAD-BEARING CAPACITY

Up to 1 kg per tile (at max. 2mm deflection)

ROBUSTNESS

Glass fibre reinforced gypsum. High pressure resistance. Highly stable ceiling ensured by tile density.

	125	250	500	1000	2000	4000
MICRO	0.40	0.55	0.65	0.60	0.60	0.55
GLOBE	0.45	0.65	0.80	0.65	0.55	0.45
QUADRIL	0.45	0.60	0.70	0.65	0.60	0.45
TANGENT	0.45	0.65	0.80	0.75	0.75	0.75

CONSTRUCTION 200 mm suspension, no mineral wool

For more information please contact your Knauf representative,
or for a webchat with our technical team, please visit www.knauf.co.uk