

Product Data Sheet

Knauf AQUAPANEL® Interior Primer



AQUAPANEL® Board Primer is a synthetic emulsion for priming AQUAPANEL® Cement Board Indoor, AQUAPANEL® Cement Board SkyLite, and AQUAPANEL® Cement Board Floor Tile Underlay to provide maximum adhesion of tiles and plasters.

Areas of Application

Bonding Primer.

Compliance Standards

EN 998-1:2016

Key Benefits

- As a bonding primer for smooth or non-absorbent backgrounds (old tiles, mastic asphalt, etc.).
- Offers a high level of adhesion for tiles and plaster.
- As a highly effective moisture barrier for timber and wood product subsurfaces before applying screed compounds, tile adhesive, etc.
- As a primer for strongly-absorbent surfaces (brick, porous concrete etc.)
- For almost non-porous trowelled layers, minimises air bubbles coming through from the subsurfaces.
- For interior walls and floors, as well as interior and exterior ceiling applications.

Technical Information

Dimensions and Weights			
Colour	Tub Size (kg)	Coverage (gsm)	Material Number
Pink	15	50-60	49279

Sustainability

Volatile Organic Compound Content (VOC)

28 Days: $2,14 \times 10^{-7}$ g/L (TVOC); $2,3 \times 10^{-8}$ g/L (TSVOC).

Storage and Handling

Store in a dry, cool and frost-free area.

The material, ambient and substrate temperature must not fall below +5°C.

Packaging

Plastic Tubs.

Shelf Life/Service Life

18 Months.

Disposal

Disposal should be in accordance with local authority requirements.

Health & Safety

Please refer to our Safety Data Sheet for guidance on Personal Protection Equipment required for the handling and installation of this product.

Application / Installation

Apply with lambswool roller or brush and allow to dry. Low temperatures or high humidity will extend the indicated drying times.

Clean tools and equipment immediately after use with clean water.

Surfaces inadvertently contaminated with AQUAPANEL® Board Primer can be cleaned with clean water. If the AQUAPANEL® Board Primer has already dried, it can only be removed mechanically (e.g. with a scraper)

Working Time: Approx. 1 minute/m²


See table below:

Substrate	Dilution (AQUAPANEL® Board Primer:water)	Coverage (g/m ²) (Concentrate per m ²)	Drying time (h) (23C/50% RH)
-----------	--	--	------------------------------

AQUAPANEL® Cement Board Indoor, Outdoor, Skylite, Floor Tile Underlay, non-absorbent backgrounds	1:2	50-60g	12
--	-----	--------	----

Additional Documentation

[Safety Data Sheet](#)

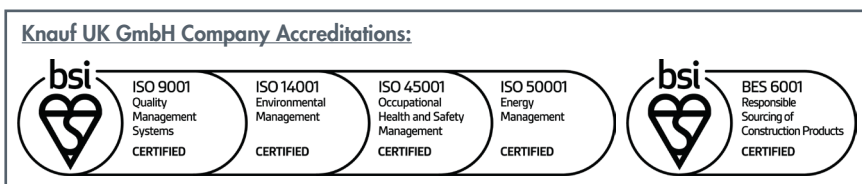

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

0800 521050 (option 2)
Live Webchat 09:00 -17:00
technical-uk@knauf.com

Website

www.knauf.co.uk
www.knauf.ie

Address

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

KML100482

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.

© Copyright Knauf 2023

Creation Date: 15/08/2023
Revision Reference: 001
Revision Date: 15/08/2023

Build for the world we live in