

Product Data Sheet

Knauf Flexible Metal Tape



Knauf Flexible Metal Tape allows you to create corners to any angle, even on irregular shaped structures such as cathedral or drop ceilings, or bay windows, and a variety of other applications.

Areas of Application

Plasterboard walls and ceilings

Compliance Standards

EN 14343:2017

Key Benefits

- Flexible to create corners at any angle
- Ideal for cathedral or drop ceilings, or bay windows
- Marked at 50cm intervals for easy measuring
- Anti-corrosion coated steel strips

Performance Data

| Performance Data | | |
|------------------------|-----------------------|---------------------------|
| Reaction to Fire (R2F) | Flexural Strength (F) | Dangerous Substances (DS) |
| E | Pass | NPD |

Technical information

| Dimensions and Weights | | | | |
|------------------------|------------|--------------|-------------|-----------------|
| Width (mm) | Length (m) | Colour | Weight (kg) | Material Number |
| 50 | 30 | Silver/Cream | 1.9 | 314834 |

Sustainability

Substances of very high Concern (SVHC)

At the time of publication, under REACH UK and REACH EU regulations this product contains no SVHC. For more information please consult the Safety Data Sheet.

Storage and Handling

No specific education is required for safe handling. Avoid damp conditions for storage.

Packaging

Recycled card box with card cutout to see the product easily.

Disposal/Repair

Any excess leftover product can be saved for another project or recycled in accordance with local authority requirements. Flexible Metal Tape which has joint compound on should be disposed of according to the requirements of the joint compound.

Health & Safety

No special precautions are necessary but the use of gloves are recommended during the handling and installation of this product.


Application / Installation

Apply 3mm thick joint compound to inside or outside corner. Fold tape at centre, with the metal side of the tape facing the surface/substrate, embed the tape in the compound and allow to dry. Apply fill coat over taped corner, feather beyond taping coat.

Additional Documentation

[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

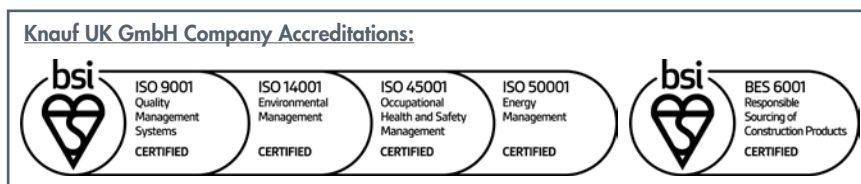

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

0800 521050 (option 2)
Live Webchat 09:00 -17:00
technical-uk@knauf.com

Website

www.knauf.co.uk
www.knauf.ie

Address (UK)

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

Address (Ireland)

Knauf
87 Broomhill Road
Tallaght
Dublin 24
D24 WR85

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.
© Copyright Knauf 2023

Creation Date: 17/05/2024
Revision Reference: 001
Revision Date: 17/05/2024